



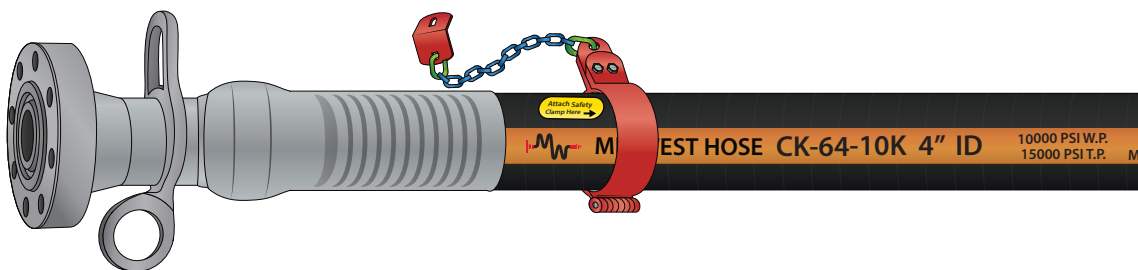

# Cement Rotary Hose

## Specification Sheet



**Tube** Nitrile

**Reinforcement** 6 or 8 steel wire spiral layers

**Cover** Neoprene/PVC (PVC improves ozone and ageing resistance)

Cement									
		ID inch	OD inch	Max WP psi	Test Pressure psi	Bend Radius at WP inch	Bend Radius in Storage inch	lbs./ft.	coupling
Designed for cementing service or acidizing service on a drilling rig. Used as a flexible connection (instead of pipe) to connect the cementing pump manifold and cementing head.	CK-32-5K	2	3.76	5,000	7,500	36	30	9.5	27
	CK-48-5K	3	4.96			36		13.6	60
	CK-56-5K	3-1/2	5.46			48		15.5	70
	CK-64-5K	4	6.34			54		24.4	85
	CK-32-10K	2	4.02	10,000	15,000	38		13.3	27
	CK-48-10K	3	5.38			48		18.7	60
	CK-56-10K	3-1/2	5.88			54		21.0	70
	CK-64-10K	4	6.61			60		30.4	85

Certifications API 7K-0060  
Max Length 150 feet  
Min Burst Requirement  
12,500 psi on 5K  
22,500 psi on 10K  
Inspected  
Proof tested to API requirements

TEST DOCUMENTATION



### Cement Rotary Hose 5K

- ☐ 2"  
☐ 3"  
☐ 3-1/2"  
☐ 4"

### Cement Rotary Hose 10K

- ☐ 2"  
☐ 3"  
☐ 3-1/2"  
☐ 4"

### APPROVAL PROCESS

JOB: \_\_\_\_\_ DATE: \_\_\_\_/\_\_\_\_/\_\_\_\_

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: \_\_\_\_\_

ENGINEER NAME: \_\_\_\_\_

ENGINEER SIGNATURE: \_\_\_\_\_



**Midwest Hose  
& Specialty, Inc.**



Find nearest location

Print setting must be on  
best quality for scanning

Corporate Headquarters  
3312 S. I-35 Service Road  
Oklahoma City, OK 73129  
405 - 670 - 6718

[www.midwesthose.com](http://www.midwesthose.com)